

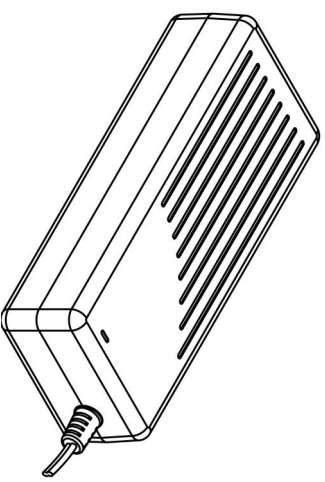
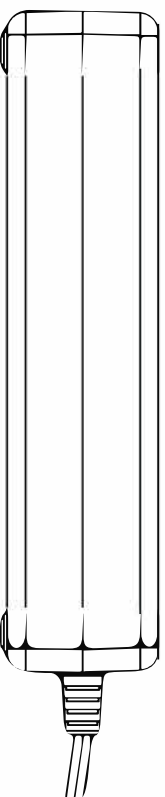
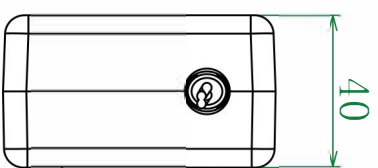


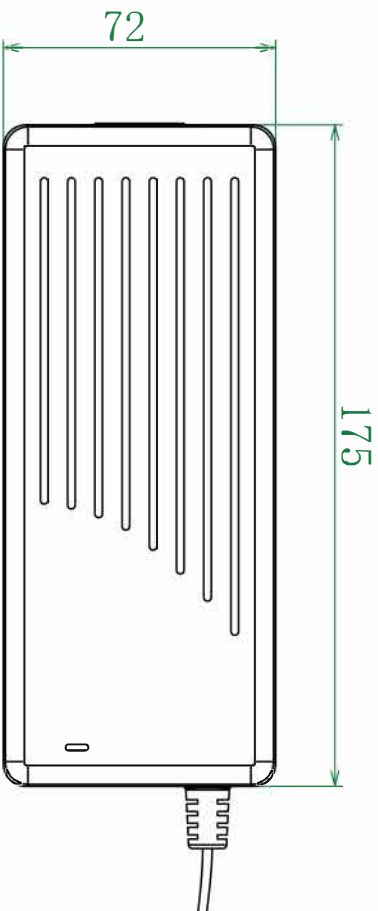

L100-24F (28.8V 2.8A) 8S Li-Fe Battery Charger		
Item	Specification	Remark
1.Input		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	1.5Arms	Input:100V Output:Full load
Max input power	100W	Input:100V Output:Full load
2.Output		
No load output voltage	DC28.8V	
Output voltage range	DC20~28.8V	
Suit with battery type	8S Li-Fe battery	
Charging current	2.8A ±10%	
Charging voltage	DC28.8V ±0.4V	
Charge-end current	≤0.2A ±0.05A	
Timer	-	
Max output power	80.64W	
Ripple voltage	≤288mV	Full load
Charging LED	Red:Charging	
	Green:Full charge or idle	
Shorted	Yes	
Reversed	Yes	
Efficiency	≥87%	Full load @220V
3.Environment		
Operate temperature	-10 ~ +40℃	
Operate humidity	< +90%	Relative humidity
Storage temperature	-40 ~ +70℃	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
4.Mechanical		
Weight	400g	
Size	175X72X40MM	Casing only
Connector	Refer to order	
5.Safety		
Max. temperature rise	< 40℃ on casing	
Safety approval	CE/cTUVus/CCC/PSE	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE

TOLERANCE FOR METAL	
DIVISION DIMENSION	TOLERANCE
-10	±0.08
10-30	±0.11
30-50	±0.13
50-80	±0.15
80-120	±0.18
120-180	±0.20
180-250	±0.25
250-400	±0.30



SHENZHEN GREEN DIGITAL POWER TECH CO., LTD

TITLE:		MATERIAL:	
MODEL: 100W-XXXXXX		WEIGHT:	
DES BY:	CAD FILE:	UNIT: mm	TEXTURE NO.
CHECK BY:	COLOR:	Paper Size: A4	SCALE:
APP BY:	FINISH/TREATMENT:		SCALE: Ft
PART NO.:	CUSTOMER P/N	DATE:	